



TECHNICAL SHEET

FLOAT LEVEL REGULATOR


SOBA



VR: Emptying / Filling

Technical characteristics :

Operating mode	: omnidirectional
Maximum pressure	: 3.5 bars
Protection index	: IP68
Standardized cables	: Neoprene 3 x 1 mm ² HR-HY 3 x 1 mm ²
Allowed fluid density	: 0.70 to 1.15
Maximum temperature	: 85°C with Neoprene cable 85°C with HR-HY cable
Biconical shell	: biconical – copolymer polypropylene
Cut-out power	: 16 (6) A (16 A resistive – 6 A inductive)
Power supply	: 12, 24, 48 VAC / VDC & 250 VAC 50 / 60 Hz
Reverser microswitch	: silver / nickel contacts
Adjustable ballast on cable	: loaded resin 250 g (included)
Float weight without cable	: 200 g
Cable weight	: Neoprene: 85 g/m – HR-HY: 95 g/m
Standard cable lengths	: 5, 6, 10, 13, 15, 20 and 25 m, specific lengths on request

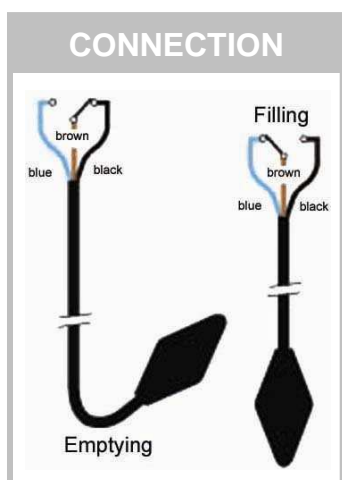

Appliances:

- Pumping stations
- Waste water plants
- Various applications on building sites
- Industrial applications
- Alarm level detection...

