

### The Water FLUXUS<sup>®</sup>

FLUXUS<sup>®</sup> ADM 5107 and ADM 5207 are low cost ultrasonic flowmeters for permanent installation specially adapted to meet the needs of the water and wastewater industry. They work according to the transit-time principle which makes use of the fact that the speed of propagation of an ultrasonic signal depends on the flow rate of the fluid in which it is propagating.


The measurement in clamp-on technology is non-invasive. The flow transducers will only be mounted onto the pipe. No pipe work is needed, no process interruption is necessary. The transducers are small, robust and watertight.

The operation of the flowmeter is easy thanks to the clearly structured user dialogue. The user-friendly firmware is specially adapted to the needs of the water industry.

Thanks to its exceptional dual-up technology with DSP, high number of measuring cycles per second and adaptive signal processing, FLUXUS ADM 5107 and ADM 5207 produce stable and reliable measuring results even under difficult conditions.



FLUXUS<sup>®</sup> ADM 5107

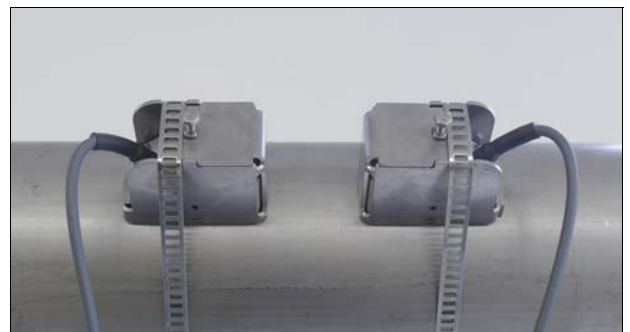

M5 flow transducers in transducer shoe, mounted with tension strap

### Features

- low cost flowmeter for permanent installation in the water and wastewater industry
- 1 or 2 flow channels
- proven FLUXUS<sup>®</sup> signal processing
- easy to install without cutting into the pipe and without process interruption
- user-friendly operation thanks to the clear and practical menu structure
- easy retrofitting on existing installations

## Technical Data

### Measuring

Measuring principle:	transit time difference correlation principle
Flow velocity:	(0.01...25) m/s
Resolution:	0.025 cm/s
Repeatability:	0.25% of reading $\pm$ 0.01 m/s
Accuracy	(for fully developed, rotationally symmetrical flow profile)
- Volume flow:	$\pm$ 2% of reading $\pm$ 0.01 m/s*
Measurable fluids:	all acoustically conductive fluids with < 10% gaseous or solid content in volume

### Transmitter

Enclosure	
- Weight:	5107: approx. 1.5 kg 5207: approx. 1.7 kg
- Deg. of protection:	IP66 acc. to EN60529
- Material:	Aluminum, powder coated
- Dimensions:	5107: (180 x 140 x 71) mm (WxHxD) without cable glands 5207: (220 x 140 x 71) mm (WxHxD) without cable glands
Flow channels:	5107: 1 5207: 2 (the two transducer pairs must be of the same type)
Power supply:	(100... 240) VAC 24 VDC
Display:	2 x 16 characters, dot matrix, backlit
Operating temperature:	-10°C...60°C
Power consumption:	< 10W
Signal damping:	(0... 100) s, adjustable
Measuring cycle:	100 Hz (1 channel)
Response time:	1 s (1 channel)

### Measuring functions

Quantities of measurement:	Volume flow, mass flow, flow velocity
Totalizers:	Volume, mass
Calculation functions:	5207: Average, difference, sum
Operating languages:	English, German, French, Dutch, Spanish

\* under reference conditions and with  $v > 0.25$  m/s

### Outputs

- The outputs are galvanically isolated from the main device.
- The basic instrument 5107 is equipped with 1 current output and 2 binary outputs (Reed relay).
- The basic instrument 5207 is equipped with 2 current output and 2 binary outputs (Reed relay).

#### Current

- Measuring range:	(0/4...20) mA
- Accuracy:	0.1% of reading $\pm$ 15 $\mu$ A
- Active output:	$R_{ext} < 500 \Omega$

#### Binary

- Reed relay:	48 V/0.25 A
- Function as state output:	Limit, sign change or error
- Properties of the pulse output:	Value: (0.01... 1 000) units Width: (80... 1 000) ms

### Flow transducers (clamp-on)

The transducers must be ordered separately. The transducer type to be used depends on the application.

**Important:** The electronic of the FLUXUS® ADM 5X07 is only prepared for the corresponding flow transducer type.

#### Type M5

Rated (possible) diameter range:	(50) 100...2500 mm
Dimensions:	(58 x 28 x 31) mm
Material	
- Transducer:	PEEK with stainless steel cap
- Cable jacketing:	PUR
- Transducer shoe:	stainless steel
Deg. of protection:	IP65 acc. to EN60529
Operating temperature:	Process: -30°C... 100°C Ambient: -30°C ... 100°C

#### Type Q5


Rated (possible) diameter range:	(10) 25...400 mm
Dimensions:	(35 x 21 x 18) mm
Material	
- Transducer:	PEEK with stainless steel cap
- Cable jacketing:	PUR
- Transducer shoe:	stainless steel
Deg. of protection:	IP65 acc. to EN60529
Operating temperature:	Process: -30°C... 100°C Ambient: -30°C ... 100°C

## Diameter Range of the Flow Transducers


The recommended diameter range is the diameter range covered by a transducer under normal measuring conditions (signal damping mainly through fluid, no gas or solid in the fluid).

The possible diameter range is the diameter range covered by a transducer under good measuring conditions.


### Transducer type

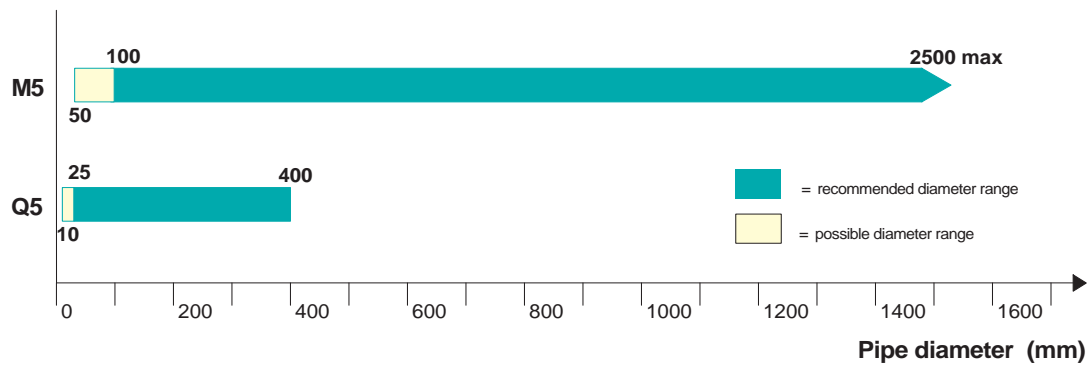


### Connection of the Transducers

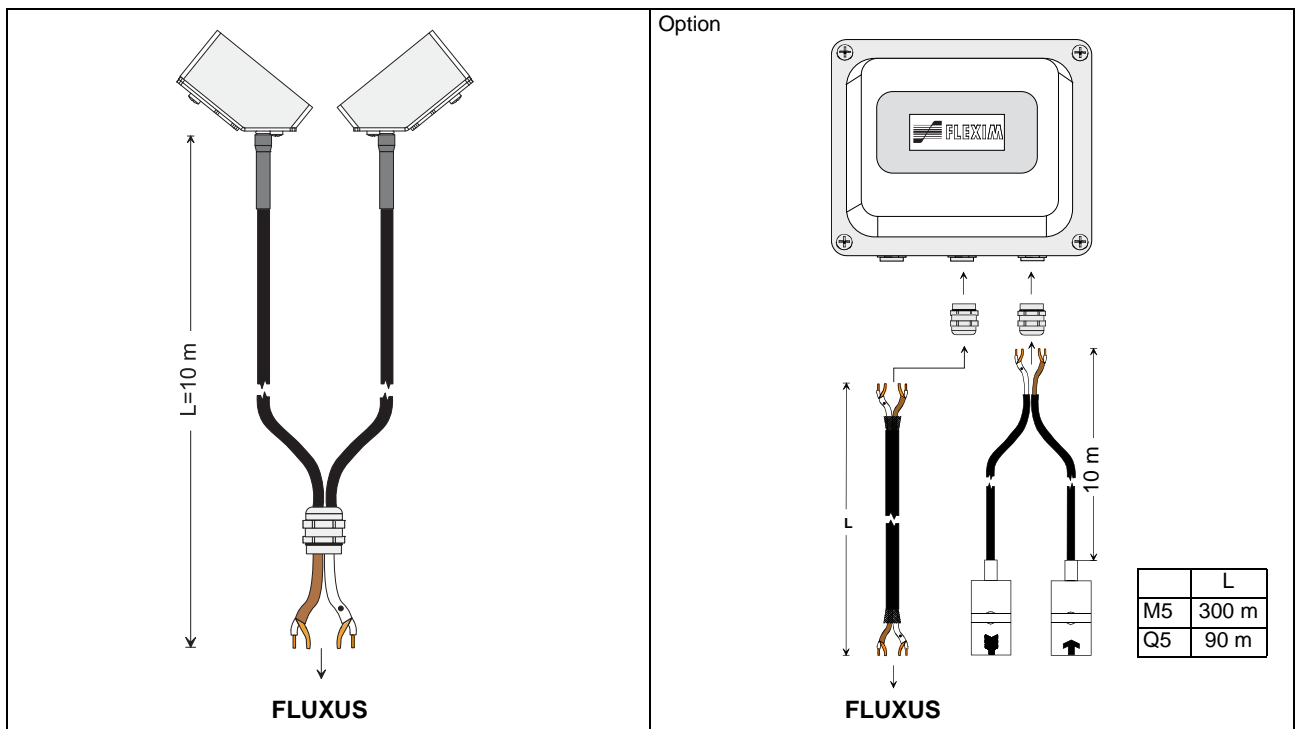

### Dimensions of the Transducers (in mm)

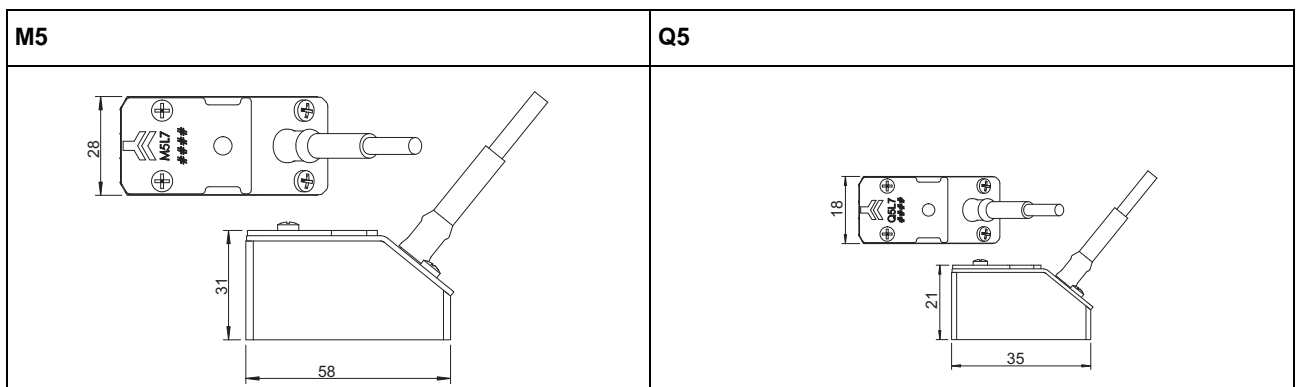

**Dimensions of the Housing of FLUXUS ADM 5107 (in mm)**

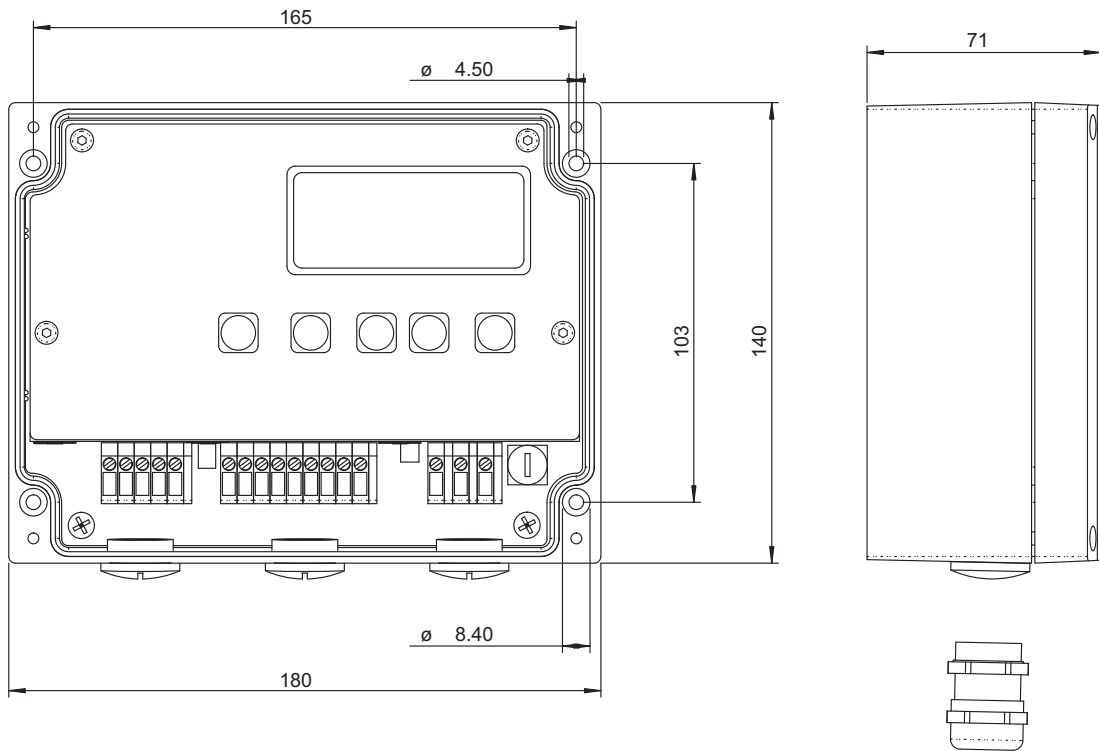

**Dimensions of the Housing of FLUXUS ADM 5207 (in mm)**

