



OPTIFLEX 1300 C Technical Datasheet

Guided Radar (TDR) Level Meter

- Universal device that can measure level of liquids, pastes, granulates, powders, and liquid interface
- Measurement down to a dielectric constant of 1.1
- Easy to install: onsite calibration is not needed



The superior TDR solution

OPTIFLEX 1300 C has higher signal dynamics and a sharper pulse than conventional TDR devices and therefore better reproducibility and accuracy. OPTIFLEX 1300 C is a Guided Radar (TDR) Level Meter for measuring distance, level, interface, level and interface, volume and mass.



- ① Touch screen with 4-button operation
- ② 2-wire level meter
- ③ Housing is rotatable and removable under process conditions
- ④ 5 different types of probes suitable for a wide range of media
- ⑤ Same housing for Ex and non-Ex
- ⑥ Large graphical display

Highlights

- Optimal process safety
- Displays level and interface
- Installation wizard
- Easy navigation using a touch screen without opening the housing
- PACTware and DTMs included as standard
- Optional second current output - used for displaying interface measurements, for example
- Higher signal dynamics and sharper pulses improve accuracy
- Display in 9 languages: even in Chinese, Japanese and Russian


Industries

- Chemicals
- Petrochemicals
- Oil & Gas
- Minerals & Mining
- Wastewater
- Pulp & Paper
- Nuclear

Applications

- Blending tanks
- Distillation tank
- Process tank
- Separator
- Solid silos (inventory)
- Storage tanks


Applications

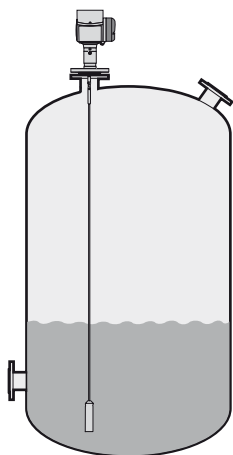

1. Level measurement of liquids

OPTIFLEX 1300 C can measure the level of a wide range of liquid products on a large variety of installations, including LPG and LNG. It does not require calibration or commissioning when installed. It can measure any liquid within the stated pressure and temperature range.


A number of probe end attachments are available. For example, the user can fix the end of cable probes to heating coils: this prevents deposits building up on the probe.

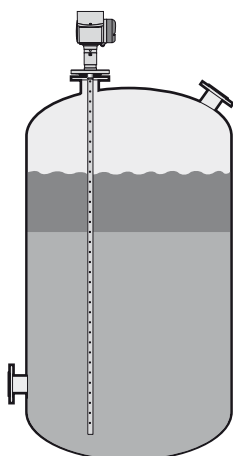

2. Interface measurement of liquids

OPTIFLEX 1300 C can measure interface with or without an air gap and level and interface simultaneously. It has an optional second analogue output.


OPTIFLEX 1300 C has top dead zone of only 10 mm / 0.4": this makes it ideal for tracking full tank or ballast interface.

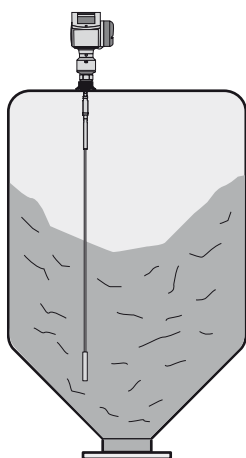

3. Level measurement of solids


OPTIFLEX 1300 C has a strengthened 8 mm / 0.3" cable probe for measuring powders and granulates in silos up to 35 m / 115 ft high. The 4 mm cable probe is used for small silos.

If a product has a very low dielectric constant ($\epsilon_r < 1.6$), OPTIFLEX 1300 C automatically switches to TBF (Tank Bottom Following) mode and keeps operating.

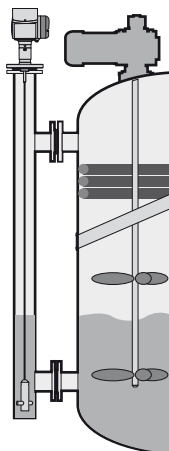


4. Measurement of liquids in a bypass chamber

OPTIFLEX 1300 C can measure accurately in agitated conditions and in the presence of foam. If the tank is full of obstructions such as agitators and reinforcements, KROHNE recommends installing the OPTIFLEX 1300 C in a bypass chamber. This solution is available from KROHNE under the name **BM 26 F**. Please refer to the **BM 26 F** Technical Datasheet for further information.

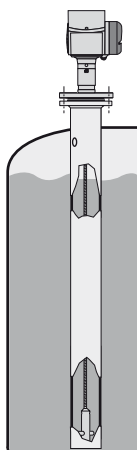

5. Measurement of liquids in a still well

You can also install the OPTIFLEX 1300 C in still well if there are vortices, agitators or other obstructions in the tank. OPTIFLEX's setup wizard allows you to quickly configure your instrument to suit specific types of installations and get the best possible performance from it.

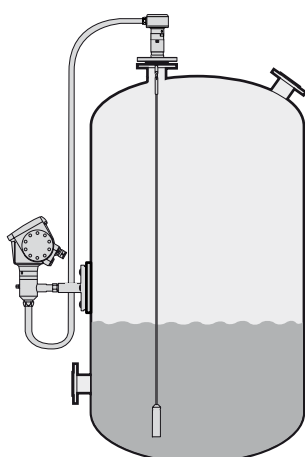

6. Remote display on high or inaccessible tanks

If it is difficult or impossible to read OPTIFLEX's integrated display at the top of the tank, KROHNE recommends the remote display option. It is provided with a cable up to 14.5 m / 47.5 ft. long and a bracket for mounting in an accessible position.

Technical Data

Input

Function	Time Domain Reflectometry (TDR)
Parameter	Level, distance, volume and/or interface
Max. measuring range	
Double rod Ø8 mm / 0.3"	4 m / 13 ft
Single rod Ø8 mm / 0.3"	4 m / 13 ft
Coaxial Ø22 mm / 0.9"	6 m / 20 ft
Double cable Ø4 mm / 0.15"	8 m / 26 ft
Single cable Ø4 mm / 0.15"	35 m / 115 ft
Single cable Ø8 mm / 0.3"	35 m / 115 ft

Output

Output signal (Output 1)	4...20 mA HART® or 3.8...20.5 mA acc. to NAMUR NE 43
Output signal (Output 2)	4...20 mA (no HART® signal) or 3.8...20.5 mA acc. to NAMUR NE 43 ①
Resolution	±3 µA
Temperature drift	Typically 50 ppm/K
Error signal	High: 22 mA; Low: 3.6 mA acc. to NAMUR NE 43

Reference conditions acc. to EN 60770

Temperature	+20°C ±5°C / +70°F ±10°F
Pressure	1013 mbar abs. ±20 mbar / 14.69 psig ±0.29 psig
Relative air humidity	60% ±15%

Accuracy

Resolution	1 mm / 0.04"
Repeatability	±1 mm / ±0.04"
Accuracy (in direct mode)	
Liquids	±3 mm / ±0.12", when distance < 10 m / 33 ft; ±0.03% of measured distance, when distance > 10 m / 33 ft
Powders	±20 mm / ±0.8"
Interface	±10 mm / ±0.4" (ε constant)
Accuracy (in TBF mode)	±20 mm / ±0.8" (ε constant)
Minimum layer (interface)	50 mm / 2"

Process conditions

Ambient temperature	-40...+80°C / -40...+175°F (EEx i: see supplementary operating instructions or approval certificates)
Storage temperature	-40...+85°C / -40...+185°F
Flange temperature	-40...+200°C / -40...+390°F (EEx i: see supplementary operating instructions or approval certificates)
Thermal shock resistance	100°C/min
Operating pressure	-1...40 bar / -14.5...580 psig; subject to process connection used and flange temperature
Dielectric constant (ϵ_r)	
Level in direct mode	≥ 1.4 for coaxial probe; ≥ 1.6 for single and double probes
Interface in direct mode	$\epsilon_r(\text{interface}) > \epsilon_r(\text{level})^2$
Level in TBF mode	≥ 1.1
Vibration resistance	IEC 68-2-6 and EN 50178 (10...57 Hz: 0.075 mm / 57...150 Hz: 1g)
Protection category	IP 66/67 equivalent to NEMA 6-6X

Material

Housing	Aluminium
Single rod	Stainless steel (1.4404 / 316 L); Hastelloy® C-22 (2.4602)
Double rod	Stainless steel (1.4404 / 316 L); Hastelloy® C-22 (2.4602)
Coaxial	Stainless steel (1.4404 / 316 L); Hastelloy® C-22 (2.4602)
Single cable	Stainless steel (1.4401 / 316 L); Hastelloy® C-22 (2.4602) [only cable $\varnothing 4$ mm / 0.15"]
Double cable	Stainless steel (1.4401 / 316)
Process fitting	Stainless steel (1.4404 / 316L); Hastelloy® C-22 (2.4602)
Gaskets	FKM/FPM (-40...+200°C / -40...+390°F); Kalrez® 6375 (-20...+200°C / -5...+390°F)
Weather protection (Option)	Stainless steel (1.4301 / 304)
Conduit for remote housing (Option)	Zinc-coated steel in a PVC sheath (-40...+105°C/-40...+220°F)

Process connections

Thread	G $\frac{3}{4}$...1 $\frac{1}{2}$; NPT $\frac{3}{4}$...1 $\frac{1}{2}$
Flange	DN25...150 (PN40 / PN16); 1"...8" (150 lb / 300 lb); 10K (40...100A)

Electrical connections

Instrument terminal 1 - Non-Ex / EEx i	14...30 VDC ②
Instrument terminal 1 - EEx d	20...36 VDC ②
Instrument terminal 2 - Non-Ex/ EEx i/ EEx d	10...30 VDC ③
Cable entry	M20x1.5; NPT $\frac{1}{2}$ "; G $\frac{1}{2}$ " (not for FM- and CSA-approved devices)
Cable tightening capacity	0.5...1.5 mm ²

User interface

Display	9 lines, 160 x 160 pixels in 8-step greyscale with 4-button keypad
Operating languages	English and a 2nd language: German, French, Italian, Spanish, Portuguese, Japanese, Chinese (Mandarin) or Russian

Approvals

ATEX	ATEX II 1, 1/2, 2 G/D EEx ia IIC T6...T3; ATEX II 1/2, 2 G/D EEx d [ia] IIC T6...T3; ATEX II 3 G EEx nA IIC T6...T3
IECEX	Ex iaD 21 T65...T90 IP 6X; Ex ia IIC T6...T4 IP 66
FM or CSA	
NEC 500/ CEC	Cl. I, Div. 1, Gr. ABCD (IS); Cl. I, Div. 1, Gr. ABCD (FM only) (XP); Cl. I, Div. 2, Gr. ABCD (XP/NI); Cl. II, Div. 1, Gr. EFG; Cl. III (FM only) (XP); Cl. II Div. 1, Gr. EFG; Cl. III (IS); Cl. II/III, Div. 2, Gr. FG (XP/NI)
NEC 505/ CEC	Cl. I, Zone 0 AEx ia Gr. IIC (CSA: Ex ia) (IS); Cl. I, Zone 1 AEx d [ia] Gr. IIC (XP); Cl. I, Zone 2, AEx nA [ia], Gr. IIC (CSA: Ex nA [ia]) (IS)
NEPSI	Ex dia IIC T3...T6; Ex ia IIC T3...T6
WHG (pending)	In conformity with the German Federal Water Act
Other approvals	Gosstandard; PESO (India)

Options and Accessories

Options	Integrated LCD display with sun cover;
	2nd current output;
	Remote housing connected to the probe via a flexible conduit ⁴
	Standard lengths: 2180 mm / 7 ft, 4720 mm / 15.5 ft, 9800 mm / 32 ft and 4880 mm / 48.5 ft
Accessories	Weather protection

¹ optional


² min./max. value for an output of 22 mA at the terminal

³ min./max. value for an output of 22 mA at the terminal (additional power supply needed - output only)

⁴ FM and CSA approvals available. ATEX approval pending.

Dimensions and Weight

Standard housing

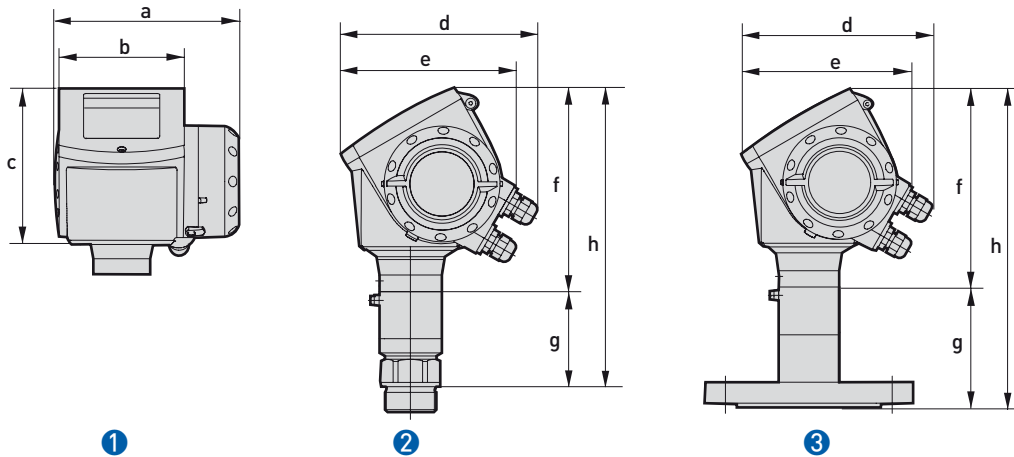

- ① Converter (front view)
- ② Thread version (right side)
- ③ Flange version (right side)

Note:

- Cable glands are delivered on demand with non-Ex, EEx i- and EEx d-approved devices.
- Non-Ex and EEx i fittings are plastic and EEx d fittings are metallic. Non-Ex fittings are black and EEx i fittings are blue.
- The diameter of the outer sheath of the cable must be 6...12 mm or 0.2...0.5".
- Cable glands for FM- or CSA-approved devices must be supplied by the customer.

Dimensions and Weight in mm and kg

	Dimensions [mm]								Weight [kg]
	a	b	c	d	e	f	g	h	
Housing	180	122	158.5	182 ①	170	190	-	-	3.3
Flange DN25...80	180	122	158.5	182 ①	170	190	126.5	316.5	4...7
Flange DN100...150	180	122	158.5	182 ①	170	190	126.5	316.5	7...12
Thread	180	122	158.5	182 ①	170	190	99	289	3


① if fitted with standard cable glands

Dimensions and Weight in inches and lbs

	Dimensions [inches]								Weight [lbs]
	a	b	c	d	e	f	g	h	
Housing	7.1	4.8	6.2	7.2 ①	6.7	7.5	-	-	7.3
Flange ASME1...3	7.1	4.8	6.2	7.2 ①	6.7	7.5	5.0	12.5	8.8...15.4
Flange ASME4...8	7.1	4.8	6.2	7.2 ①	6.7	7.5	5.0	12.5	15.4...26.5
Thread	7.1	4.8	6.2	7.2 ①	6.7	7.5	3.9	11.4	6.6

① if fitted with standard cable glands

Remote housing

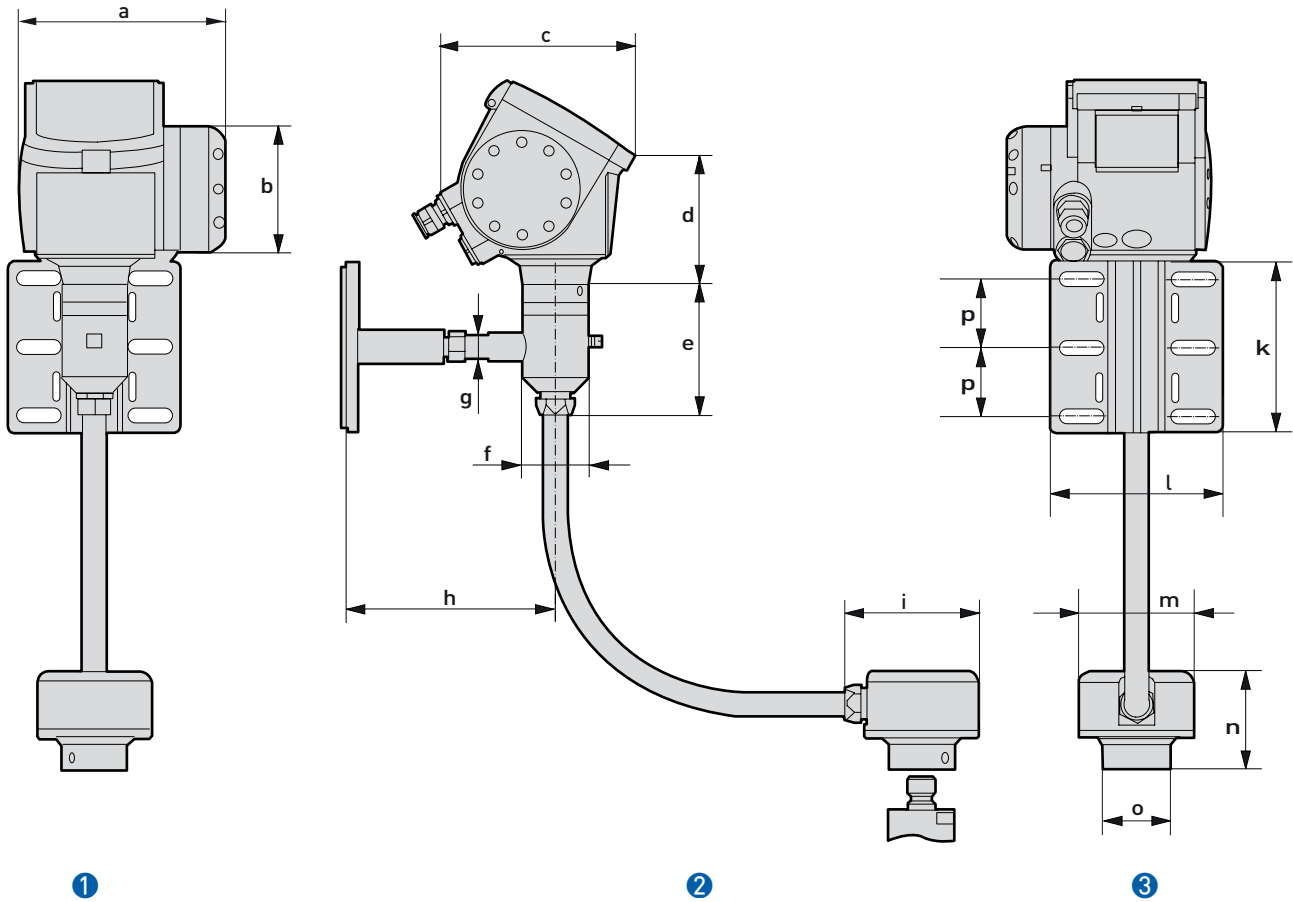

- ① Front view
- ② Left side
- ③ Rear view

Dimensions and Weights in mm and kg

	Dimensions [mm]															Weight [kg]
	a	b	c	d	e	f	g	h	i	k	l	m	n	o	p	
Remote version	180	109	165	193	98.5	58	21	183	117	150	150.4	100	86	58	60	6.6...12.85

① wall bracket (1.4 kg) + housing support (1.5 kg) + remote probe housing (2.7 kg) + flexible conduit (2 m: 1 kg; 4.5 m: 2.25 kg; 9.5 m: 4.75 kg; 14.5 m: 7.25 kg)

Dimensions and Weights in inches and lbs

	Dimensions [inches]															Weight [lbs]
	a	b	c	d	e	f	g	h	i	k	l	m	n	o	p	
Remote version	7.09	4.29	6.50	7.60	3.88	2.28	0.83	7.20	4.60	5.91	5.92	3.94	3.39	2.28	2.36	14.6...28.3

① wall bracket (3.1 lbs) + housing support (3.3 lbs) + remote probe housing (6.0 lbs) + flexible conduit (6.6 ft: 2.2 lbs; 14.8 ft: 5.0 lbs; 31.2 ft: 10.5 lbs; 47.6 ft: 16.0 lbs)

Remote version limits


- For interface and solid (powder, granulate) applications the maximum extension length is 4.5 m / 14.8 ft.
- For liquid level applications, the maximum measuring range is reduced according to the length of the electric cable between the flange and the converter (extension length).

Extension length		Max. measuring range	
[m]	[ft]	[m]	[ft]
2	6.6	30	98
4.5	14.8	25	82
9.5	31.2	15	29
14.5	47.6	5	16.4

Applications


- Tank with a lot of vibration
- Limited space on the top of the tank or limited access (due to the size of the compact converter)
- Remote display at the bottom of the tank

Single probes

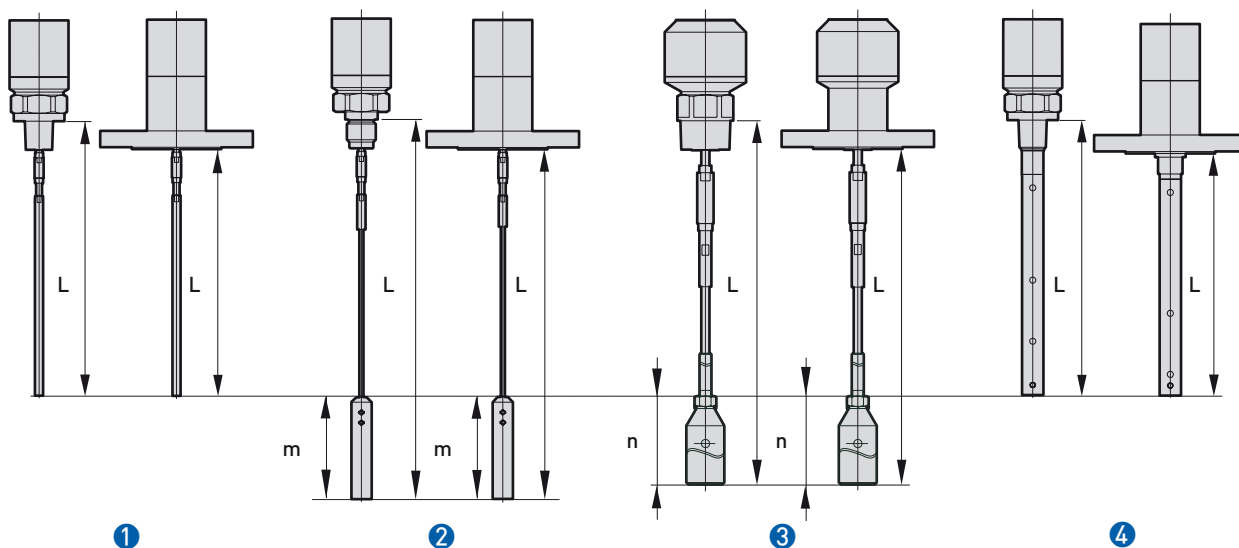

- ① Single rod $\varnothing 8$ mm / $\varnothing 0.3$ " (thread and flange versions)
- ② Single cable $\varnothing 4$ mm / $\varnothing 0.15$ " (thread and flange versions)
- ③ Single cable $\varnothing 8$ mm / $\varnothing 0.3$ " (thread and flange versions)
- ④ Coaxial $\varnothing 22$ mm / $\varnothing 0.9$ " (thread and flange versions)

Double probes

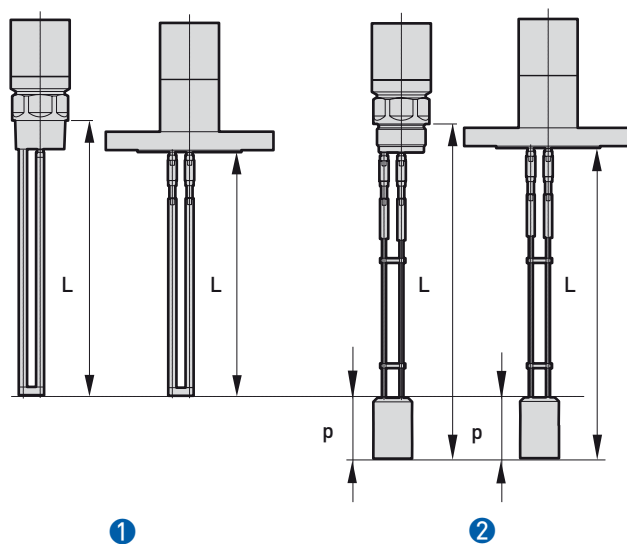

- ① Double rod $\varnothing 8$ mm / $\varnothing 0.3$ " (thread and flange versions)
- ② Double cable $\varnothing 4$ mm / $\varnothing 0.15$ " (thread and flange versions)

Note:

A wide range of counterweights and anchoring solutions are available. Contact KROHNE for further information.

Single probes: Dimensions in mm

Probes	Dimensions [mm]		
	L max.	m	n
Single rod Ø8 mm	4000	-	-
Single cable Ø4 mm	35000	100	-
Single cable Ø8 mm	35000	-	0 ①
Coaxial Ø22 mm	6000	-	-

① for Ø12 mm counterweight. If Ø38 mm counterweight ordered: 245 mm

Single probes: Dimensions in inches

Probes	Dimensions [inches]		
	L max.	m	n
Single rod Ø0.3"	158	-	-
Single cable Ø0.15"	1378	4.0	-
Single cable Ø0.3"	1378	-	0 ①
Coaxial Ø0.9"	236	-	-

① for Ø0.5" counterweight. If Ø1.5" counterweight ordered: 9.6"

Double probes: Dimensions in mm

Probes	Dimensions [mm]	
	L max.	p
Double rod Ø8 mm	4000	-
Double cable Ø4 mm	8000	60


Double probes: Dimensions in inches

Probes	Dimensions [inches]	
	L max.	p
Double rod Ø0.3"	158	-
Double cable Ø0.15"	315	2.4

Probe weight

Probes	Min. process connection size		Weight	
	Thread	Flange	[kg/m]	[lbs/ft]
Single cable Ø4 mm / 0.15"	G ¾A; NPT ¾	DN25 PN40; 1" 150 lb; 1½" 300 lb	0.12	0.08
Single cable Ø8 mm / 0.3"	G 1½A; NPT 1½	DN40 PN40; 1½" 150 lb; 2" 300 lb	0.41	0.28
Double cable Ø4 mm / 0.15"	G 1½A; NPT 1½	DN50 PN40; 2" 150 lb; 2" 300 lb	0.24	0.16
Single rod Ø8 mm / 0.3"	G ¾A; NPT ¾	DN25 PN40; 1" 150 lb; 1½" 300 lb	0.41	0.28
Double rod Ø8 mm / 0.3"	G 1½A; NPT 1½	DN50 PN40; 2" 150 lb; 2" 300 lb	0.82	0.56
Coaxial Ø22 mm / 0.9"	G ¾A; NPT ¾	DN25 PN40; 1" 150 lb; 1½" 300 lb	0.79	0.53

Measurement limits

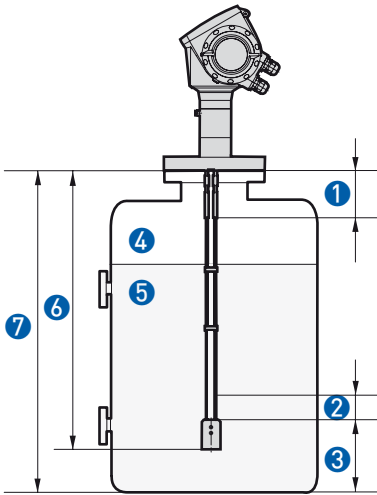

- ① A1, Blocking distance: Min. distance from flange to top limit of measuring range.
- ② A2, Bottom dead zone: Length at end of probe, where measurement is not possible.
- ③ D, non measurement zone: Zone where measurement cannot be taken.
- ④ Gas (Air)
- ⑤ Product 1
- ⑥ L, Probe length: Length specified by customer in the order.
- ⑦ Tank Height

Measuring limits in mm

Probes	Blocking distance, A1 $\epsilon_r = 80$	Bottom dead zone, A2 $\epsilon_r = 80$	Blocking distance, A1 $\epsilon_r = 2.3$	Bottom dead zone, A2 $\epsilon_r = 2.3$
	[mm]			
Double rod	125	10	165	50
Single rod	200	10	250	50
Coaxial	10	10	10	50
Double cable	125	10	165	50
Single cable $\varnothing 8$ mm / $\varnothing 0.3$ "	200	10	250	50
Single cable $\varnothing 4$ mm / $\varnothing 0.15$ "	200	10	250	50

80 is ϵ_r of water; 2.3 is ϵ_r of oil

Measuring limits in inches

Probes	Blocking distance, A1 $\epsilon_r = 80$	Bottom dead zone, A2 $\epsilon_r = 80$	Blocking distance, A1 $\epsilon_r = 2.3$	Bottom dead zone, A2 $\epsilon_r = 2.3$
	[inches]			
Double rod	4.90	0.40	6.50	1.95
Single rod	7.90	0.40	9.90	1.95
Coaxial	0.40	0.40	0.40	1.95
Double cable	4.90	0.40	6.50	1.95
Single cable $\varnothing 8$ mm / $\varnothing 0.3$ "	7.90	0.40	9.90	1.95
Single cable $\varnothing 4$ mm / $\varnothing 0.15$ "	7.90	0.40	9.90	1.95

80 is ϵ_r of water; 2.3 is ϵ_r of oil

Probe selection

	Double rod	Single rod	Coaxial	Double cable	Single cable Ø8 mm / 0.3"	Single cable Ø4 mm / 0.15"

Maximum probe length, L

4 m / 13 ft	■	■				
6 m / 20 ft			■			
8 m / 26 ft				■		
35 m / 115 ft					■	■

Liquids

Liquid application	■	■	■	■	■	■
LPG, LNG	■		■	■		
Highly viscous liquids		■				■
Highly crystallising liquids		■				■
Highly corrosive liquids	■	■	■			■
Foam		■	■			■
Agitated liquids	■		■	①		①
Spray in tank			■			
Storage tanks	■	■	■	■		■
Installation in bypass chamber	■	■	■	■		■
Small diameter nozzles	■		■	■		
Long nozzles	■		■	■		
Stilling wells	■	■	■	■		■
Interface measurement	■		■	■		②

Solids

Powders					■	
Granules, <5 mm / 0.1"					■	

■ standard ■ optional □ on request

- ① with anchor fitting
- ② max. length is 20 m / 65.5 ft







KROHNE Product Overview

- Electromagnetic flowmeters
- Variable area flowmeters
- Mass flowmeters
- Ultrasonic flowmeters
- Vortex flowmeters
- Flow controllers
- Level measuring instruments
- Pressure gauges
- Temperature measuring instruments
- Water solutions & analysis
- Oil and gas turnkey solutions

Addresses:

Germany

Northern sales office

KROHNE Messtechnik GmbH & Co. KG
Bremer Str. 133
D-21073 Hamburg
Phone: +49 (0)40 767 3340
Fax: +49 (0)40 767 33412
nord@krohne.de
ZIP code: 10000 - 29999, 49000 - 49999

Western and middle sales office

KROHNE Messtechnik GmbH & Co. KG
Ludwig-Krohne-Straße
D-47058 Duisburg
Phone: +49 (0)203 301 416
Fax: +49 (0)203 301 10416
west@krohne.de
ZIP code: 30000 - 34999, 37000 -
48000, 50000 - 53999, 57000 - 59999,
98000 - 99999

Southern sales office

KROHNE Messtechnik GmbH & Co. KG
Landsberger Str. 392
D-81241 Munich
Phone: +49 (0)89 121 5620
Fax: +49 (0)89 129 6190
sued@krohne.de
ZIP code: 0 - 9999, 80000 - 89999,
90000 - 97999

Southwestern sales office

KROHNE Messtechnik GmbH & Co. KG
Rüdesheimer Str. 40
D-65239 Hochheim/Main
Phone: +49(0)6146) 827 30
Fax: +49 (0)6146 827 312
rhein-main@krohne.de
ZIP code: 35000 - 36999, 54000 -
56999, 60000 - 79999

Instrumentation and control equipment catalog

TABLAR Messtechnik GmbH
Ludwig-Krohne-Straße 5
D-47058 Duisburg
Phone: +49 (0)2 03 305 880
Fax: +49 (0)2 03 305 8888
kontakt@tablar.de www.tablar.de

KROHNE sales companies

International

Australia

KROHNE Australia Pty Ltd
Quantum Business Park 10/287
Victoria Rd Rydalmere NSW 2116
Phone: +61 2 8846 1700
Fax: +61 2 8846 1755
krohne@krohne.com.au

Austria

KROHNE Austria Ges.m.b.H.
Modecenterstraße 14
A-1030 Vienna
Phone: +43 (0)1/203 45 32
Fax: +43 (0)1/203 47 78
info@krohne.at

Belgium

KROHNE Belgium N.V.
Brusselstraat 320
B-1702 Groot Bijgaarden
Phone: +32 (0)2 4 66 00 10
Fax: +32 (0)2 4 66 08 00
krohne@krohne.be

Brazil

KROHNE Conaut Controles
Automaticos Ltda.
Estrada Das Águas Espriaiadas, 230
C.P. 56 06835 - 080 EMBU - SP
Phone: +55 (0)11-4785-2700
Fax: +55 (0)11 4785-2768
conaut@conaut.com.br

China

KROHNE Measurement Instruments
(Shanghai) Co. Ltd., (KMIC)
Room 1501
1033 Zhaojiabang Road
Shanghai 200030
Phone: +86 21 6487 9611
Fax: +86 21 6438 7110
info@krohne-asia.com

Czech Republic

Sobisická 156
63800 Brno
Phone: +420 (0)545.242 627
Fax: +420 (0)545 220 093
brno@krohne.cz

France

KROHNE S.A.S.
Les Ors BP 98
F-26103 ROMANS Cedex
Phone: +33 (0)4 75 05 44 00
Fax: +33 (0)4 75 05 00 48
info@krohne.fr

Great Britain

KROHNE Ltd.
Rutherford Drive
Park Farm Industrial Estate
Wellingborough
Northants NN8 6AE
Phone: +44 (0)19 33 408 500
Fax: +44 (0)19 33 408 501
info@krohne.co.uk

CIS

Kanex KROHNE Engineering AG
Business-Centre Planeta
Office 404 ul.
Marxistskaja 3
109147 Moscow/Russia
Phone: +7 (0)095 911 7165
Fax: +7 (0)095 742 8873
krohne@dol.ru

India

Krohne Marshall Ltd.
A-34/35, M.I.D.C. Industrial Area,
H-Block
Pimpri Poona 411018
Phone: +91 (0)202 744 2020
Fax: +91 (0)202 744 2020
pcul@vsnl.net

Iran

KROHNE Liaison Office
North Sohrevardi Ave. 26,
Sarmad St., Apt. #9
Tehran 15539
Phone: +9821 8874 5973
Fax: +9821 8850 1268
krohne@krohneiran.com

Italy

KROHNE Italia Srl.
Via V. Monti 75
I-20145 Milan
Phone: +39 02 4300 661
Fax: +39 02 4300 6666
info@krohne.it

Korea

KROHNE Korea
Room 508 Miwon Bldg 43
Yoido-Dong Youngdeungpo-Ku
Seoul, Korea
Phone: 00-82-2-782-1900
Fax: 00-82-2-780-1749
krohnekorea@krohnekorea.com

Netherlands

KROHNE Nederland B.V.
Kerkeplaat 14
NL-3313 LC Dordrecht
Phone: +31 (0)78 630 6200
Fax: +31 (0)78 630 6405
Service Direct: +31 (0)78 630 6222
info@krohne.nl

Norway

KROHNE Norway A.S.
Ekholtveien 114
NO-1521 Moss
Phone: +47 (0)69 264 860
Fax: +47 (0)69 267 333
postmaster@krohne.no

Poland

KROHNE Polska Sp.z.o.o.
ul. Stary Rynek Oliwski 8a
80-324 Gdansk
Phone: +48 (0)58 520 9211
Fax: +48 (0)58 520 9212
info@krohne.pl

Switzerland

KROHNE AG
Uferstr. 90
CH-4019 Basel
Phone: +41 (0)61 638 30 30
Fax: +41 (0)61 638 30 40
info@krohne.ch

Singapore

Tokyo Keiso - KROHNE (Singapore)
Pte. Ltd.
14, International Business Park,
Jurong East
Chiyoda Building, #01-01/02
Singapore 609922
Phone: (65) 6567 4548
Fax: (65) 6567 9874
tks@tokyokeiso-krohne.com.sg

Republic of South Africa

KROHNE Pty. Ltd.
Bushbock Close
Corporate Park South
Midrand, Gauteng
P.O. Box 2069
Midrand, 1685
Phone: +27 (0)11 314 1391
Fax: +27 (0)11 314 1681
midrand@krohne.co.za

Spain

I.I. KROHNE IBERIA, S.r.l.
Poligono Industrial Nilo
Calle Brasil, nº. 5
28806 Alcalá de Henares Madrid
Phone: +34 (0)91 883 2152
Fax: +34 (0)91 883 4854
krohne@krohne.es

USA

KROHNE, Inc.
7 Dearborn Road
Peabody, MA 01960
Phone: +1 (800) FLOWING
Phone: +1 (978) 535 6060 (in MA)
info@krohne.com

Representatives

Algeria
Argentina
Cameroon
Canada
Chile
Columbia
Croatia
Denmark
Ecuador
Egypt
Finland
Gabon
Ghana
Greece
Hong Kong
Hungary
Indonesia
Iran
Ireland
Israel
Ivory Coast
Japan
Jordan
Kuwait
Libya
Lithuania
Malaysia
Mauritius
Mexico
Morocco
New Zealand
Peru
Portugal
Romania
Saudi Arabia
Senegal
Slovakia
Slovenia
Sweden
Taiwan
Thailand
Tunisia
Turkey
Venezuela
Yugoslavia

Other countries

KROHNE Messtechnik GmbH & Co. KG
Ludwig-Krohne-Str. 5
D-47058 Duisburg
Phone: +49 (0)203 301 0
Fax: +49 (0)203 301 389
export@krohne.de